

FEATURES:

Comply with all category 6 requirements as:

- ISO/IEC 11801-1 Class E:2017
- ANSI/TIA 568.2-D:2018
- CENELEC EN 50173-1:2018
- CENELEC EN 50288-6-1:2013
- IEC61156-5:2012(Edition 2.0)
- 3P & ETL Verified
- Characterized and tested to 350MHz

Compliant with safety standard as:


- IEC 60754-2:2011 (Edition 2.0)
- IEC 61034-1 / 61034-2:2013
- IEC 60332-1-2:2004
- RoHS compliant(EU Directive 2011/65/EC)



CONFIGURATION:

Conductor	Material	Bare Copper	
	Construction	23 AWG	
Insulation	Material	HDPE	
	Diameter	1.00 ± 0.1 mm	
Cross Member	Material	PE	
Sheath	Material	PVC	LSOH
	Thickness	0.5mm nominal	
	Diameter	6.2 ± 0.3 mm	6.2 ± 0.3 mm
Operation Temperature		-20°C~+60°C	
Installation Temperature		0°C~+50°C	
Storage Temperature		-30°C~+60°C	

DRAWING:

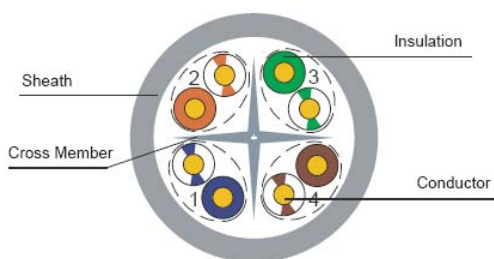

2	3
ORANGE /WHITE	GREEN /WHITE
BLUE /WHITE	BROWN /WHITE
1	4

Premium Line Systems GmbH reserves the right to change specifications without prior notice.

Part No. 20614x115

Ver. 1901

Product Specification

APPLICATIONS:

- 1000BASE-TX
- 1000BASE-T
- 100BASE-TX Fast Ethernet
- 10BASE-T Ethernet
- Voice

ELECTRICAL PERFORMANCE:

Impedance	64kHz	125Ω± 20%
	1~350MHz	100Ω± 15%



TIA



Typical

Freq	IL (dB)		NEXT (dB)		PS NEXT (dB)		ACR (dB)		PSACR (dB)		ACR-F (dB)		PS ACR-F (dB)		Return Loss (dB)	
1.0	2.1	1.8	74.3	82.3	72.3	77.3	72.2	80.5	70.2	75.5	67.8	84.8	64.8	79.8	20.0	29.0
4.0	3.8	3.5	65.3	73.3	63.3	68.3	61.4	69.8	59.4	64.8	55.8	72.8	52.8	67.8	23.0	32.0
10.0	6.0	5.6	59.3	67.3	57.3	62.3	53.3	61.7	51.3	56.7	47.8	64.8	44.8	59.8	25.0	38.0
16.0	7.6	7.1	56.2	64.2	54.2	59.2	48.6	57.1	46.6	52.1	43.7	60.7	40.7	55.7	25.0	34.0
20.0	8.5	7.9	54.8	62.8	52.8	57.8	46.2	54.9	44.2	49.9	41.8	58.8	38.8	53.8	25.0	34.0
31.25	10.8	10.0	51.9	59.9	49.9	54.9	41.1	49.9	39.1	44.9	37.9	54.9	34.9	49.9	23.6	32.0
62.5	15.5	14.4	47.4	55.4	45.4	50.4	31.9	41.0	29.9	36.0	31.9	48.9	28.9	43.9	21.5	32.0
100.0	19.9	18.6	44.3	52.3	42.3	47.3	24.4	33.7	22.4	28.7	27.8	44.8	24.8	39.8	20.1	32.0
160.0	25.9	24.1	41.2	49.2	39.2	44.2	15.5	25.1	13.5	20.1	23.7	40.7	20.0	35.7	18.7	31.0
200.0	29.0	26.8	39.8	47.8	37.8	42.8	10.8	21.0	8.6	16.0	21.8	38.8	18.8	33.8	18.0	29.0
250.0	33.0	30.5	38.3	46.3	36.3	41.3	5.3	15.8	3.3	10.8	19.8	37.0	16.8	31.8	17.3	29.0
350.0 *	-	34.0	-	45.1	-	39.9	-	8.9	-	4.1	-	35.1	-	29.5	-	27.0

*Values for frequencies above international industry standards are for information.

ORDERING INFORMATION:

Part No. 20614x115

Description Category 6 U/UTP Installation cable, grey, 305m box packing

x: sheath 1: PVC 2: LSOH

Packing 305m/box

box dimension: 42*42*21cm, weight: N.W.13.5 kg G.W. 14.0 kg

Premium-Line Systems GmbH, Rosenheimer Str.89, D-83064 Raubling, Germany

► TEL: + 49(0)8035 9836 0 ► Fax: + 49(0)8035 9836 22

Premium Line Systems GmbH reserves the right to change specifications without prior notice.

info@suntechnology-eg.com

https://suntechnology-eg.com

Phone 01040706287

2/2