


FBWLCUC11

Base Product

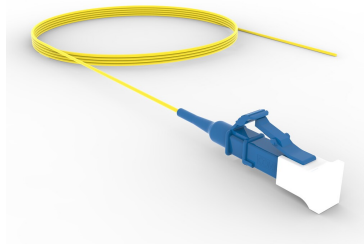

TeraSPEED® LC/UPC to Unconnectorized, Fiber Pigtail, 0.9 mm SBJ

Product Classification

| | |
|------------------------------|--|
| Regional Availability | Asia Australia/New Zealand China Europe India Latin America Middle East/Africa North America |
| Portfolio | CommScope® |
| Product Type | Fiber pigtail, unjacketed |
| Product Brand | SYSTIMAX InstaPATCH® 360 |
| Product Series | FBW |
| Ordering Note | Minimum length may vary based on cable configuration |

General Specifications


| | |
|-------------------------------|--------|
| Color, boot A | Blue |
| Color, connector A | Blue |
| Interface, Connector A | LC/UPC |
| Jacket Color | Yellow |
| Total Fibers, quantity | 1 |

Dimensions

| | |
|---|--------|
| Cable Assembly Length Range (m) | 1 – 20 |
| Cable Assembly Length Range (ft) | 1 – 66 |

Ordering Tree

FBWLCUC11

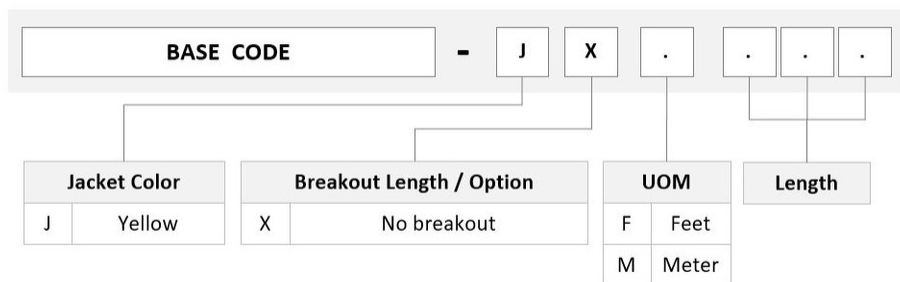

Mechanical Specifications

Cable Retention Strength, maximum 2.00 lb @ 90 ° | 5.00 lb @ 0 °

Optical Specifications

Fiber Mode Singlemode

Fiber Type G.652.D | G.657.A1, TeraSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Dual Rated LSZH/Riser

Packaging and Weights

Packaging quantity 2

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| ANATEL | Compliant |
| CHINA-ROHS | Below maximum concentration value |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |
| REACH-SVHC | Compliant as per SVHC revision on www.commscope.com/ProductCompliance |
| ROHS | Compliant |
| UK-ROHS | Compliant |



Included Products

FBWLCUC11

- | | | |
|-------------------|---|--|
| 760004564 | – | Fiber Indoor Cable, TeraSPEED® 0.9 mm Low Smoke Zero Halogen Reinforced Buffered, 1 |
| N-001-RF-8W-F09YL | | fiber, Singlemode G.652.D and G.657.A1, Gel-free, Feet jacket marking, Yellow jacket color |
| 860657283 | – | LC/UPC Connector, Singlemode, Blue |