


Base Product



TeraSPEED® SC/UPC to Unconnectorized, Fiber Pigtail, 0.9 mm SBJ

Product Classification

Regional Availability

Asia | Australia/New Zealand | China | Europe | India | Latin America | Middle East/Africa | North America

Portfolio

CommScope®

Product Type

Fiber pigtail, unjacketed

Product Brand

SYSTIMAX InstaPATCH® 360

Product Series

FBW

Ordering Note

Minimum length may vary based on cable configuration

General Specifications

Color, boot A

Blue

Color, connector A

Blue

Interface, Connector A

SC/UPC

Jacket Color

Yellow

Total Fibers, quantity

1

Dimensions

Cable Assembly Length Range (m)


1 – 20

Cable Assembly Length Range (ft)

1 – 66

Ordering Tree

FBW/SCUC11

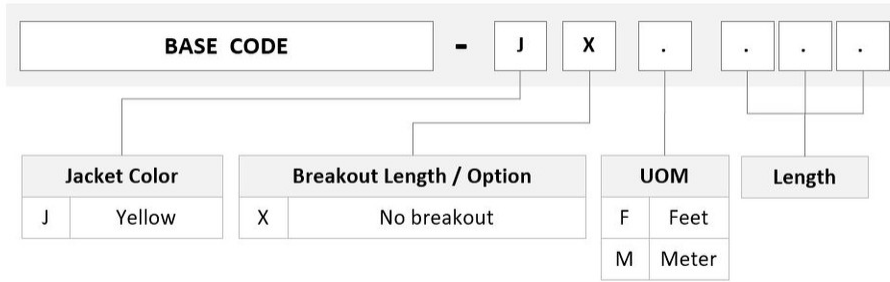

Mechanical Specifications

Cable Retention Strength, maximum 2.00 lb @ 90 ° | 5.00 lb @ 0 °

Optical Specifications

Fiber Mode Singlemode

Fiber Type G.652.D | G.657.A1, TeraSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Dual Rated LSZH/Riser

Packaging and Weights

Packaging quantity 2

Regulatory Compliance/Certifications

Agency	Classification
ANATEL	Compliant
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant



Included Products

FBWSCUC11

760004564	–	Fiber Indoor Cable, TeraSPEED® 0.9 mm Low Smoke Zero Halogen Reinforced Buffered, 1
N-001-RF-8W-F09YL		fiber, Singlemode G.652.D and G.657.A1, Gel-free, Feet jacket marking, Yellow jacket color
860648962	–	SC/UPC Connector, Singlemode, Blue